




Product News

RToddS Engineering: New, Patented Tool Prevents Dropped Fasteners

Edited by on 19. Jun. 2017

There are more than 50,000 OSHA recordable incidents involving "struck by falling object" every year in the United States, according to the Bureau of Labor Statistics. That's one injury caused by a dropped object roughly every 10 minutes.¹ Many of these injuries are significant and some fatal. The cost of accidents and the effects on the worker and company are well documented. But what about the cost of a near miss or an incident that damages expensive machinery? A new tool has been developed to help reduce incidents of dropped fasteners and the related costs.

The patented Washer and Nut Keeper (WANK) is a flexible rubber socket set that can be loaded with any combination of nuts, bolts or washers of a given size. Once loaded, the fasteners stay in the flexible socket and in perfect alignment for starting them either in a tapped hole or on a stud or bolt. The flexible socket has ribs for easy gripping. Once the fastener stack is started, the Washer and Nut Keeper is removed and the final torqueing is done with conventional sockets or wrenches.

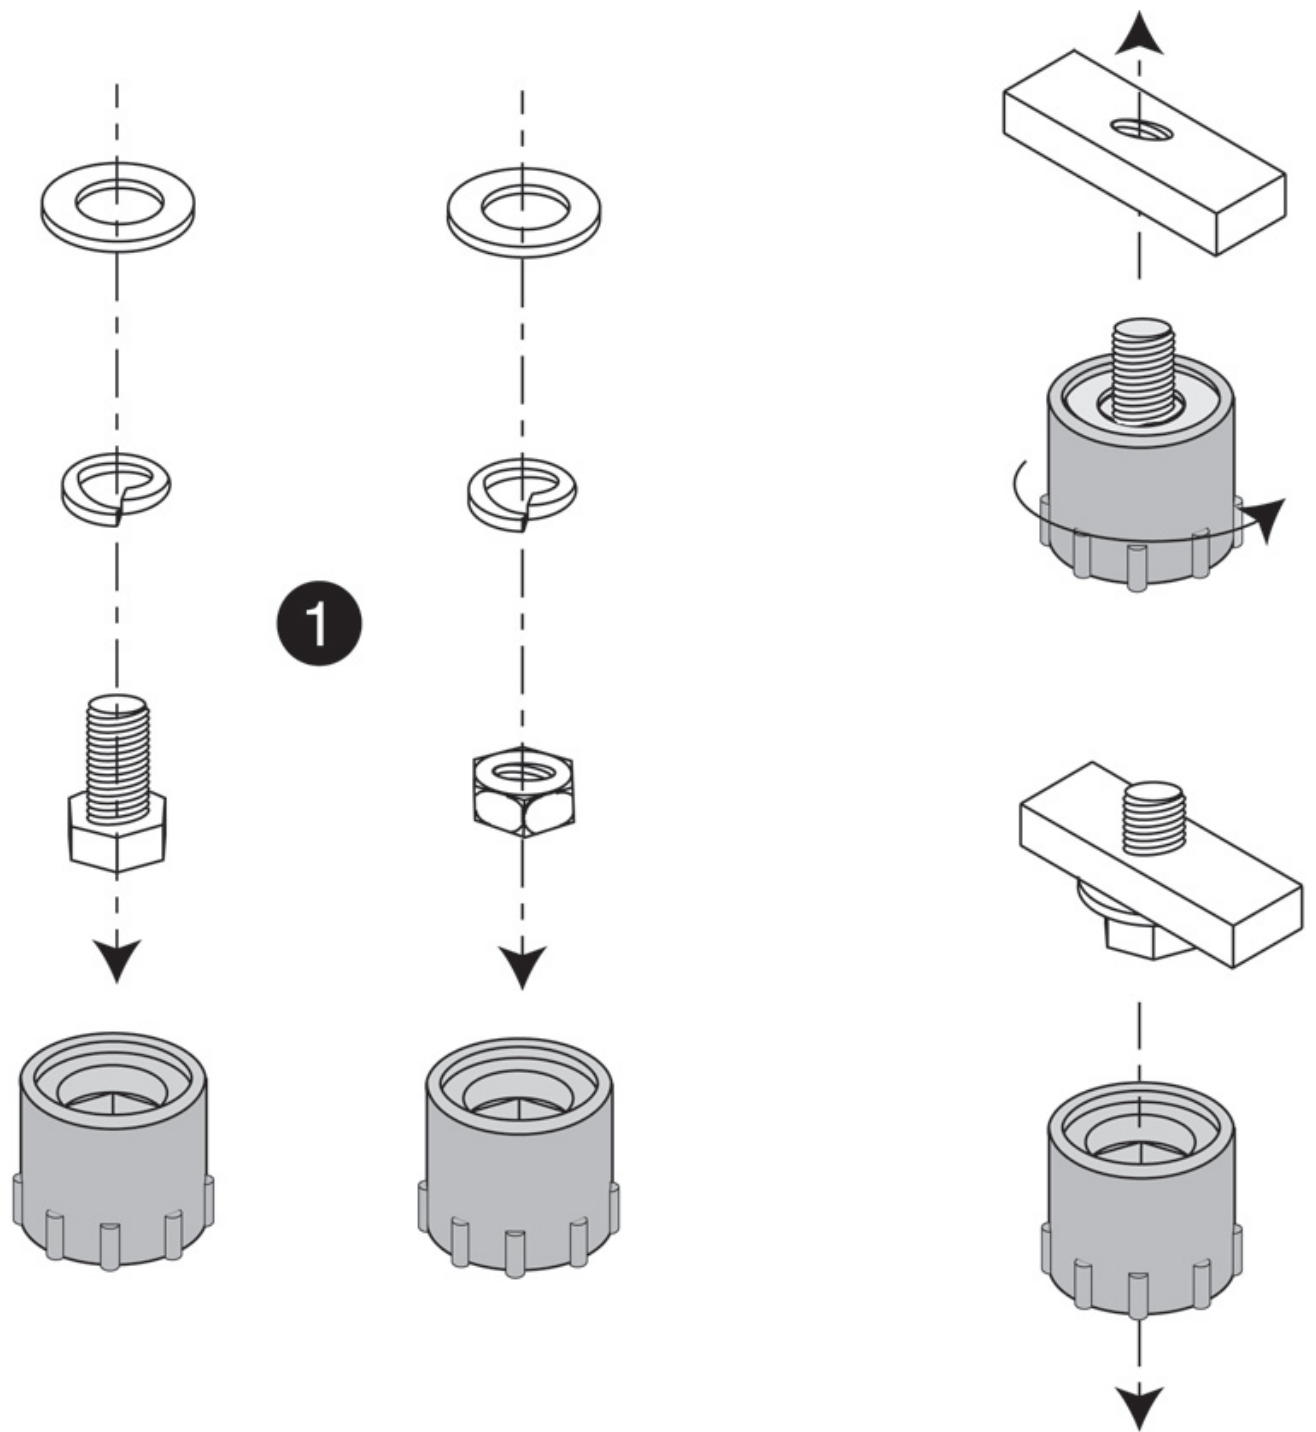

1 Load Fasteners **2 Start Fasteners** **3 Remove Wa**

Figure 1: How it works

What is the cost of a dropped fastener? It could be as little as the time it takes a staff member to leave the work station and find the fastener or, if dropped in a machine such as a pump or into a process, it could be catastrophic -- ruining expensive equipment or product quality. What if it was a specialty fastener and the last one on hand? Is it reasonable to risk final assembly while short one fastener, or is the project put on hold until a replacement is found?



Figure 2: Pre-loaded Keeper with breakaway lanyard

While in most cases being struck by a falling fastener isn't lethal, OSHA calculates the direct cost to the employer for a lost time injury due to a contusion is over USD27,000.¹ If a worker is just one floor up and drops a fastener, it can take several minutes to retrieve the fastener and try again. Even at a total labor cost

of just USD50 per hour, that's a couple dollars or more every time a nut, washer or bolt is dropped -- assuming that it can be found again! When trying to start a combination of fasteners (for example, a nut, flat washer and lock washer) in hard-to-reach locations or at an awkward work position, it's not uncommon for there to be multiple mishaps before they are started without dropping or cross-threading them.



Figure 3: A typical Washer and Nut Keeper set

The Washer and Nut Keeper can help solve this age-old problem, improving safety and productivity at the same time. Fasteners can be preloaded into the flexible sockets before work is started to ensure the proper sequence of fasteners and speed up site work. Gloves can be worn while using the device to reduce lacerations, which OSHA estimates the direct cost to the employer at over USD19,000² per incident. Each socket is designed with a series of cavities that securely hold the fasteners in place, and the base has an opening for a standard ratchet drive or extension. A Washer and Nut Keeper can be designed for any combination of standard, metric or specialty fasteners. A typical set of eight is a ¼ inch through ¾ inch set for US Standard and SAE fasteners. The Washer and Nut Keeper is protected by U.S. patent 9,416,810 B2 and foreign patents pending.

RTodds Engineering, LLC is located in Palm Coast Florida. The Principal, **R. Todd Swinderman**, is a licensed Professional Engineer in Florida and Illinois specializing in bulk material handling and conveyor safety training. For more information, visit www.rtodds-eng.com or contact rtodds.eng@gmail.com.

References:1. The Sky Isn't Falling (And Your Tools Shouldn't Either) EHS Today, March 20162.

<https://www.osha.gov/dcsp/smallbusiness/safetypays/estimator.html>