




Product News

## **Schenck Process announces newly designed Plug Single Tunnel (PST30) Diverter Valve**

Edited by on 9. Dec. 2017

*Darmstadt, Germany –*

Additional features include 145° port-to-port rotation, a 2-way switching capability for either dilute phase or dense phase conveying applications, aluminum or 316 stainless steel housing, end plates, plugs and inlet and outlet ports flanged to mate 150# ANSI or 10N-DIN flange patterns. The housing, plug, and endplates on the aluminum valve are hard anodized for wear resistance.

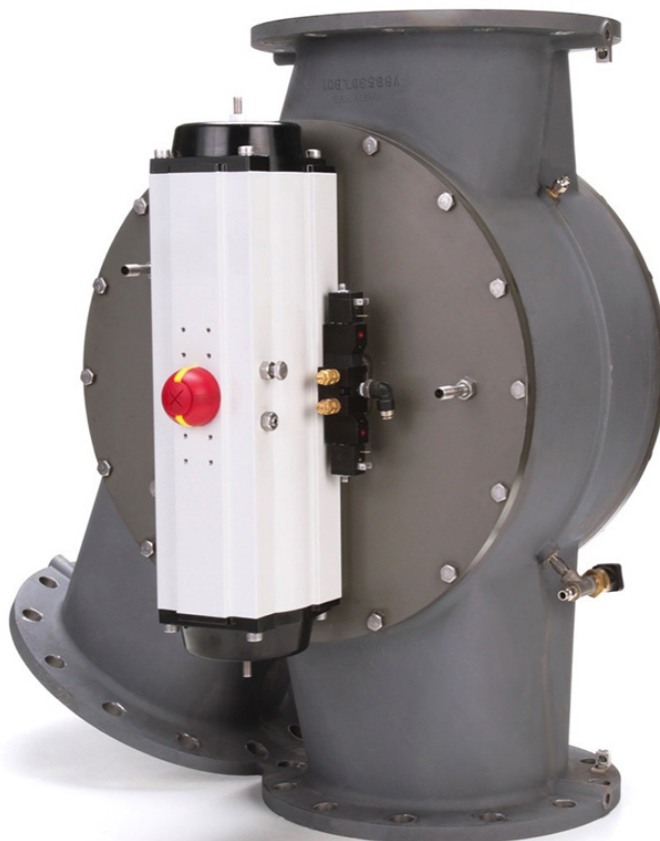

To complete the unit, a pneumatic actuator providing a 4 second actuation time between ports, a 4-way double, and 3-way single solenoid air control valve with NEMA 4 enclosure, and 2 SPST proximity sensors are included. The new version of the PST30 Diverter Valve can also be designed without inflatable seals.