Fast Fair Flexible

Used|refurbished hammer crusher 250 tph output i00214

Intercem offers one used and refurbished double shaft hammer crusher made by MIAG in 1973. The machine type 56D 37S is designed for limestone crushing. The two rotors are equipped with 28 hammers each and have an impact circle diameter of 1320mm. The arrangement also includes the conveying equipment to feed and discharge the hammer crusher.

Scope of supply:

- Hammer crusher housing
- Two rotors with bearings
 - Diameter rotor
 - Hammers
 - Hammergewicht
 - Feeding size
 - Feed material
 - Moisture
 - Max. feeding material size
 - Bulk density
 - Output

1320 mm
28 per rotor
37 kg per hammer
1675 x 1700 mm
Limestone
approx. 4 - 6 %
1000x1000x1000mm
approx. 1,5 t / m³
appox. 250 tph



In case of Interest please contact:

Mr. Tim Hücking, tel. +49 2522 92058-17, t.huecking@intercem.de

Intercem Engineering GmbH Carl-Zeiss-Str. 10 59302 Oelde, Germany Phone: +49 2522 92058-0

Fax: +49 2522 92058-0

www.intercem.de

Intercem Engineering is a leading company for the supply of used and new equipment for the cement industry. Turn key plants are either designed as combination of used and —as fare as necessary- new equipment. A high-class team of engineers provides comprehensive engineering for technology and design also for complete new production lines. If you are interested the o.m. component could be implemented in a comprehensive solution.



Page 1 of 4 IC00214 2/2009

Fast Fair Flexible

- Two motors 150 kW, 975 Upm, 6.000 V, 50 Hz with starter
- Crusher grids
- Apron feeder:

Width: 1400 mm C-tc: 7,64 m Inclination: 18 $^{\circ}$ With gearbox and speed adjustable drive 155 – 430 V, 34 -29 A, 2100 – 700 Rpm, 13,2 -3,8 kW.

- Chain scraper
- Spare parts

Total weight:

Approx. 100 '000kg



Fig.1: Lower cover of the hammer crusher

Fast_Fair_Flexible_



Fig. 2: Apron feeder of the hammer crusher



Fig. 4: Motor of the rotor

Page 3 of 4 IC00214 2/2009

Fast_Fair_Flexible_



Fig. 5: Rotor with hammer

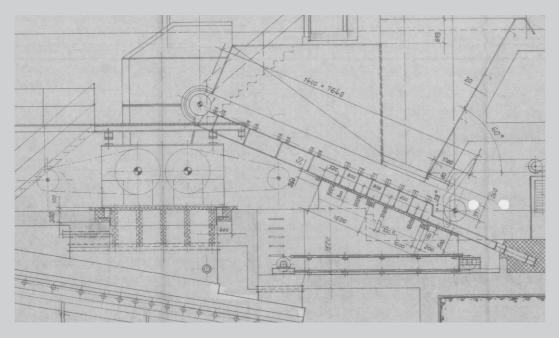


Fig. 6: General arrangement drawing

Page 4 of 4 IC00214 2/2009