


# RULMECA GROUP

Motorized Pulleys 220 to 330 HP  
for bulk handling



INTRODUCTION

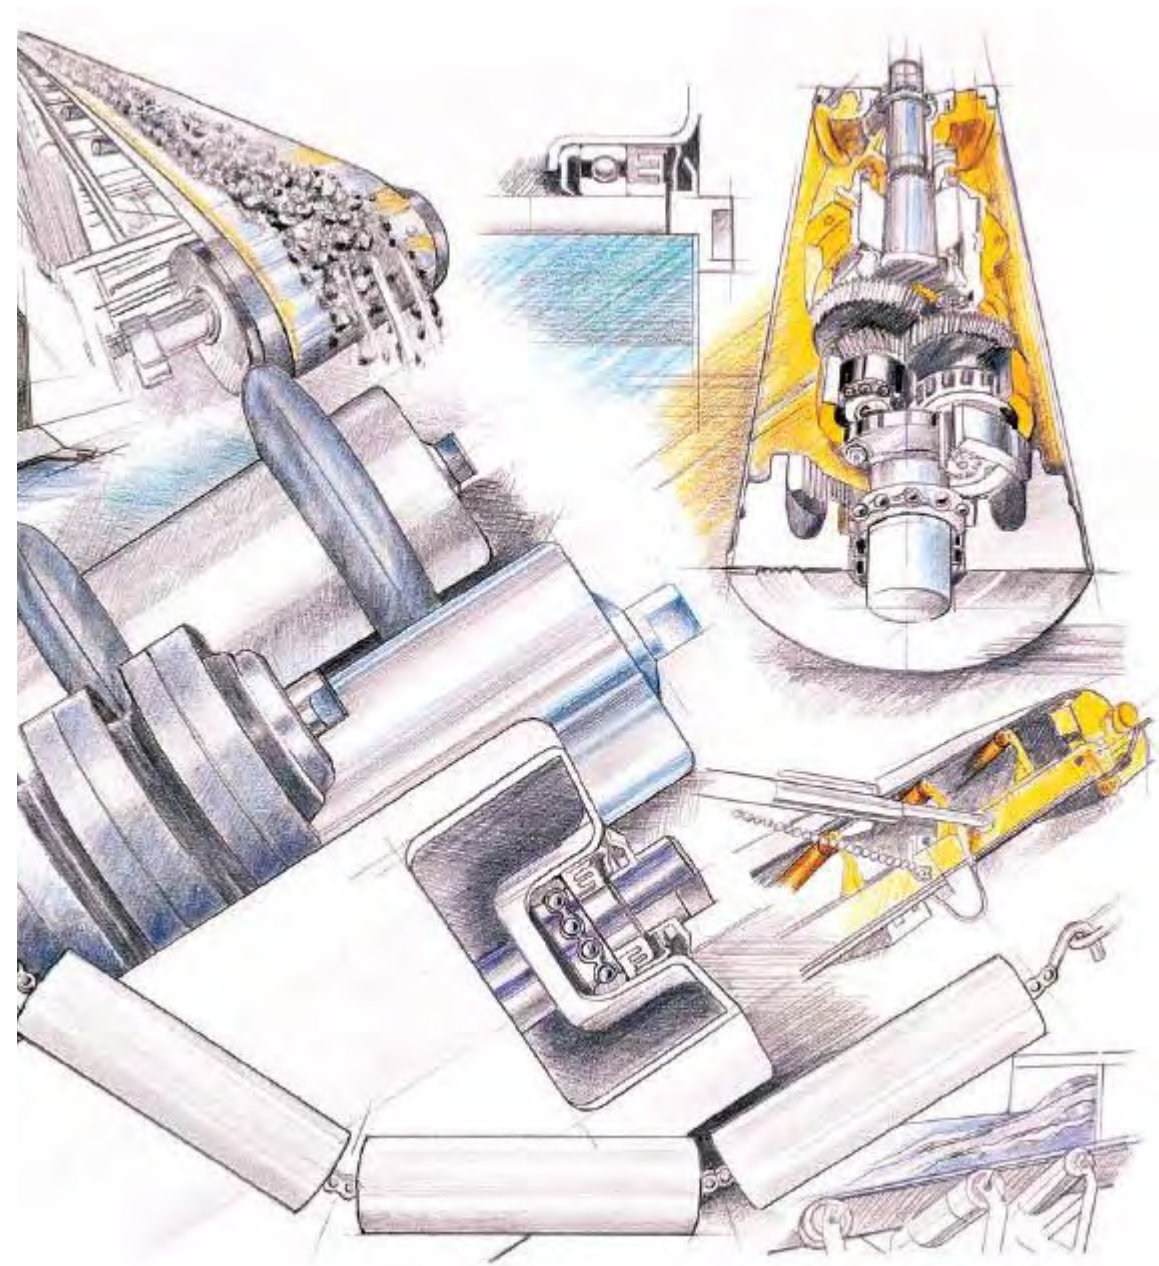



## Table of Contents

Introduction	page 2
General Description	page 3
Design	page 4
Optional Extras	page 5
Dimensions	page 6
Power Range	page 7
Examples of Application	page 8
Contacts	page 9



## Motorized Pulleys for Belt Conveyors

The Rulmeca Motorized Pulley was first produced in 1953 specifically for belt conveyor systems.

The aim was to produce an extremely compact, totally enclosed and highly efficient belt conveyor drive, resistant to dust, water, oil, grease or harmful substances. A Motorized Pulley which would be quick and simple to install and would require virtually no maintenance.

These aims were achieved and today the Rulmeca Motorized Pulley is considered to be one of the most reliable and effective belt conveyor drives available throughout the world. The Motorized Pulley is a highly efficient geared motor drive, which is hermetically sealed within a steel cylindrical shell.

The shell, which is usually crowned to ensure central belt tracking, is fitted with

bearing housings incorporating precision bearings, double lipped seals and rotates about a static pair of shafts.

The motor stator is fixed to the shafts and the motor winding cables pass through one of the shafts, eliminating the need for slip rings and brushes.

The three phase squirrel cage induction motor, manufactured in steel laminate, is machined concentric to high tolerances and designed to give 200% starting torque.

The rotor pinion is coupled directly to the gearbox.

The gearbox transmits torque to the shell through a geared rim and provides a highly efficiency motor with very little frictional losses.

The Motorized Pulley is oil filled, which acts as both a lubricant and coolant. Heat is dissipated through the shell and the conveyor belt.


All vital parts are CNC machined.

The Rulmeca Motorized Pulley is supplied as standard with:

- Machined mild steel crowned shell
- Electric motor manufactured in accordance with IEC 34-1 (EN60034-1), (VDE 0530).
- Class H insulation according to IEC 34-1 (EN60034-1), (VDE 0530).
- Most international voltages.
- Standard voltages supplied with  $\pm 10\%$  tolerance in accordance with IEC 38.
- Factory oil filled and tested.
- Degree of protection IP66/67 (EN60034-1).

Rulmeca Motorized Pulleys are manufactured according to the Council Directives of the European Communities.

The CE-marking is according to Directive 2006/95/EC relating to electrical equipment and according to Directive 2004/108/EC relating to electrical magnetic compatibility and amendments.

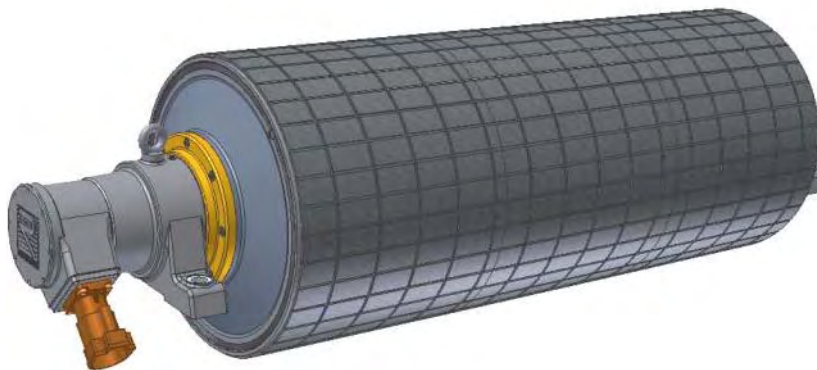



## Motorized Pulley 1000HD, Ø 40.16 in. (1020 mm)

The RULMECA Motorized Pulley type 1000HD is a highly developed reliable and strong drive with an outstanding power range of 220–330HP. It is able to take a high radial load and robust in design. Therefore it is especially developed for use in:

- Mining conveyors,
- Excavators,
- Stackers,
- Reclaimers,
- Heavy loaded conveyors in gravel and sand

The motorized pulley 1000HD is designed for tough, irregular, extreme and brutal working conditions.

The compact design allows the design engineers to save material and cost when developing the conveyor.

With its high protection rating and its standard labyrinth sealing system, this Motorized Pulley can be used in all ambient conditions.

### STANDARD SPECIFICATION of Motorized Pulley

- Crowned mild steel shell, outside diameter 40.16 in.
- Mild steel shafts.
- Totally enclosed cast iron brackets,
- Shell lagged with 0.39 in thick bonded ceramic lagging,
- Bearing houses from cast steel.
- Three stage cast steel gearboxes.
- Sealing system with degree of protection IP66/67 (EN60034-5).
- Terminal box from cast iron.
- 3-phase induction motors with 3 phase single voltage,
- Std. voltage 460v/3ph/60Hz,
- Please specify voltage.
- Motor winding insulation class H,
- 3 bimetallic thermal protectors connected in series, 2 temperature resistors PT100 and 3 PTC-resistors connected in series installed in the winding,
- Rotor dynamically balanced.
- 2 oil plugs (with magnet).
- Minimum roller length (RL = 55.12 in at 220 HP & 59.06 in at 330 HP,
- Synthetic oil EP220.

- First oil change recommended after 30,000 operational hours.
- Regreasable labyrinth seals.

### Please Note!

- Special speeds available on request,
- Environmental conditions in main catalog on pages 72-73,
- Technical precautions in main catalog page 76-91,
- Optional extras on page 4,
- Connection diagrams on page 92 in the main catalog,



## OPTIONAL EXTRAS


### Motorized Pulley 1000HD

Specification	Availability
Different types and shapes of ceramic lagging	x
Mechanical backstop	x
Dust explosion proof Motorized Pulleys - ATEX 95 - Zone 22 - for applications handling of dusty grain etc. According to European Directive 94/9/EC.	x
Degree of protection IP66/67	Std.
Allowable ambient temperatures -13 degrees F to +120 degrees F	Std.
External brake shaft (for mechanical brake by others)	x
Motor protection and control by 3 bimetallic thermal protectors connected in series, 2 temperature sensors PT100 and 3 PTC-resistors connected in series	Std.
Insulation class H with synthetic oil	Std.
Thermal winding protection	Std.
Voltage North America (3 x 460V, 3 x 575V, 3 x 999V at 60 Hz) with tolerances +/- 10% (DIN IEC 38)	Std.
IP66/67 cast iron terminal box	Std.
Other voltages from 400V up to 1000V	x
CSA approved motors	x

x = Optional extras  
 Std. = Fitted as standard



# Motorized Pulley 1000HD, Ø 40.16 in. (1020 mm)

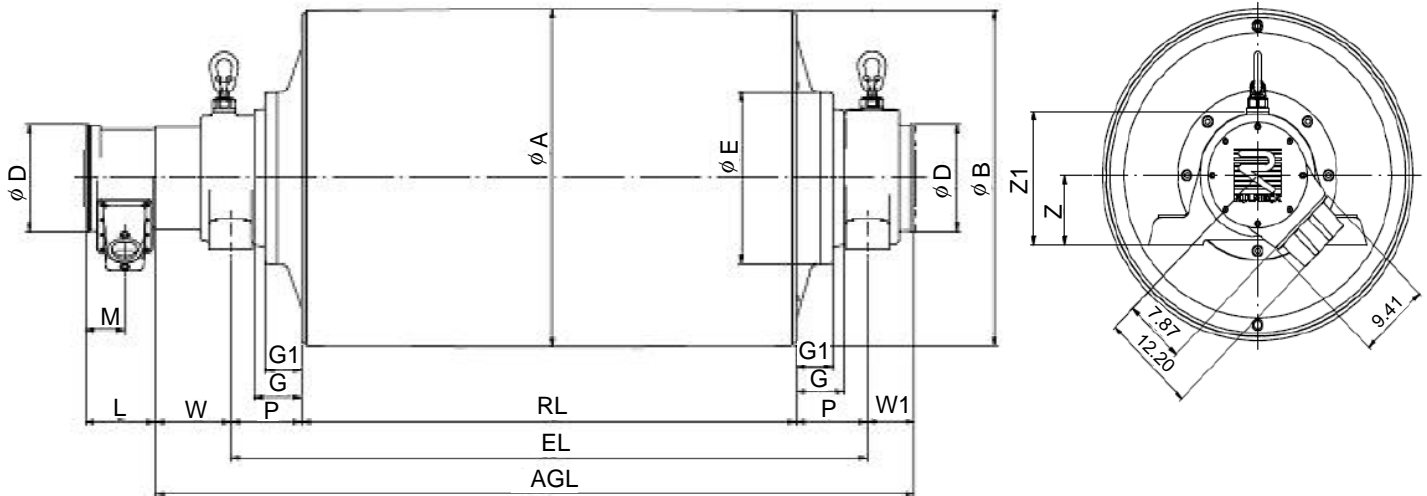

## Motorized Pulley Dimensions


Type	A <sup>1</sup> in	B <sup>2</sup> in	D <sup>3</sup> in	E in	G in	L in	P in	W in	W1 in	W4 in
1000HD	40.16	39.92	7.99	20.47	5.71	8.35	8.46	8.98	5.59	5.91

- 1 A dimension is outer diameter of lagged pulley shell at pulley centerline.
- 2 B dimension is outer diameter of lagged pulley shell at each end of shell.
- 3 D dimension is shaft diameter.

## Bracket Dimensions

Type*	S in	W2 in	W3 in	X in	X1 in	Z in	Z1 in
AL	1.97	5.12	2.56	22.05	28.23	8.46	16.22
ALO	1.97	5.12	2.56	22.05	28.23	8.46	16.22

- \* AL is drive side bracket and is locked against rotation.  
 ALO is non-drive side bracket and is free to rotate.

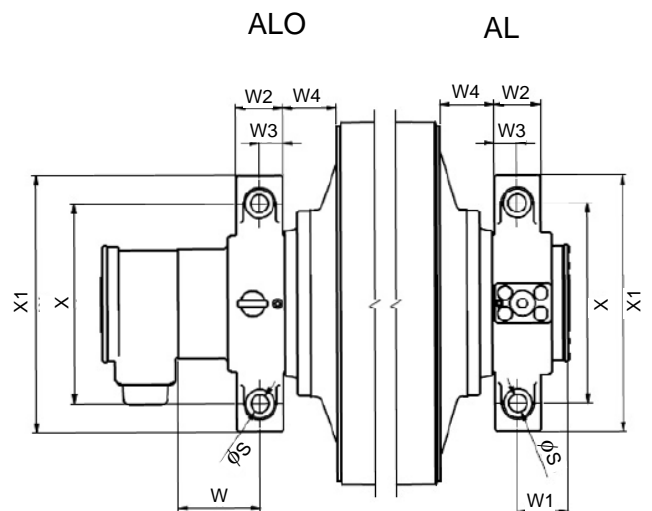





## Motorized Pulley 1000HD\*, Ø 40.16 in. (1020 mm) 60 Hz

Motor		No. Gear Stages	Model	Nominal belt speed <sup>1</sup> at Full Load 60 Hz fpm	Actual belt speed <sup>1</sup> at Full Load 60 Hz fpm	Belt Pull <sup>2</sup> lbs	Max. Radial Load <sup>3</sup> T1 + T2 lbs	Min. RL in	RL Dimension inches (RL>70.87" available on request) Weight in lbs <sup>5</sup>									
Power HP	No. of Poles								55.12	57.09	59.06	61.02	62.99	64.96	66.93	68.90	70.87	longer than 70.87
220	4	3	1000HD	600	-	13,354	67,443	55.12	9,259	9,414	9,513	9,656	9,800	9,943	10,086	10,229	10,373	See Note <sup>4</sup>
				756	-	10,746												
				960	-	8,453												
				1080	-	7,351												
270	4	3	1000HD	600	-	16,703	67,443	57.09	-	9,811	9,965	10,064	10,207	10,351	10,494	10,637	10,781	See Note <sup>4</sup>
				756	-	13,489												
				960	-	10,566												
				1080	-	9,206												
330	4	3	1000HD	600	-	20,885	67,443	59.06	-	-	10,362	10,516	10,615	10,759	10,902	11,045	11,188	See Note <sup>4</sup>
				756	-	16,838												
				960	-	13,219												
				1080	-	11,521												
				1320	-	9,689												

1 Use "nominal belt speed" to specify lagged pulley. "Actual full load belt speed of lagged pulley," when available, will assist with process design calculations.


2 Belt pull value allows for gearbox loss.

3 Pulley must not be subjected to radial load exceeding "Maximum Radial Load" defined above.

4 Additional Motorized Pulley weight: Model 1000HD: 70.87" ≤ RL ≤ 98.43" Wt = 72.7 lbs/in.

5 All weights shown above are for pulleys "fully lagged" with 0.39" thick ceramic.

\* Available October 2010.

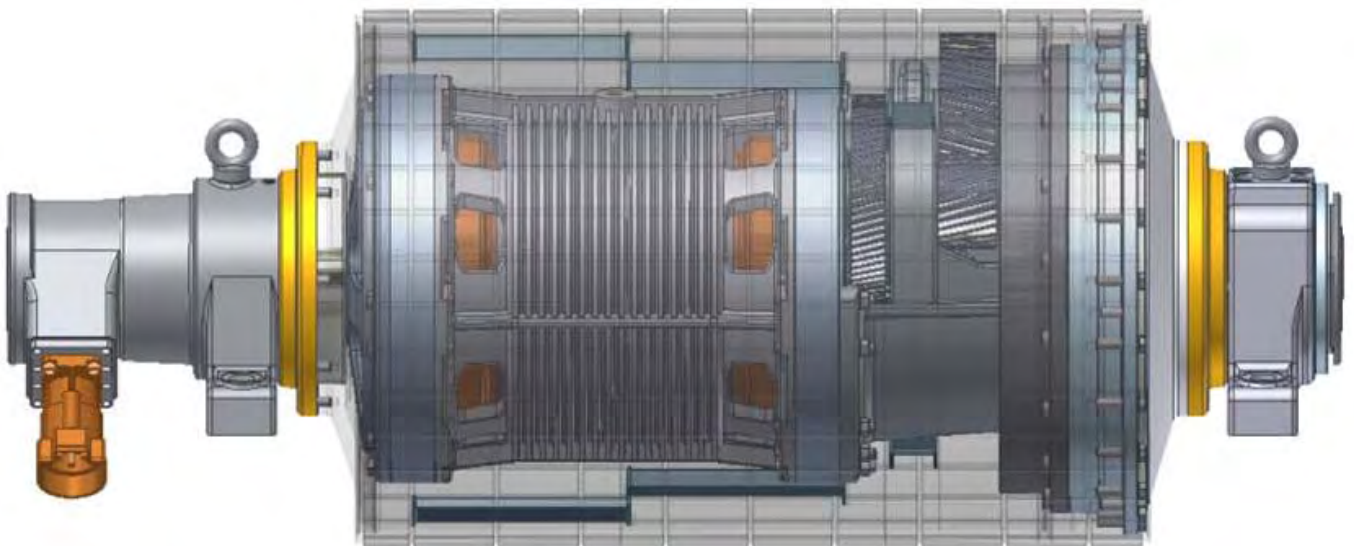



## Examples of applications







## AFRICA

### SOUTH AFRICA

#### MELCO Conveyor Equipment

Cnr. Hertzog & Jack Pienaar Street  
Germiston South Ext. 7, P.O. Box 131,  
1400 Germiston, South Africa  
Phone:+27 11 825 3520  
Fax:+27 11 825 3592  
Web:www.melcoconveyors.com  
email:conveyors@melco.co.za

## ASIA

### CHINA

#### RULMECA (TIANJIN) Co. Ltd.

B2-4, Saida International Industrial Park,  
Xiqing Economic Development Area (XEDA)  
Tianjin, People's Republic of China, 300385  
Phone:+86-22-2388-8628  
Fax:+86-22-2388-9828  
email:sales@rulmecca.com.cn

### ISRAEL

#### COMTRANS ENGINEERING Ltd.

5 Hahoma Street Rishon le-Zion 75655, Israel  
Phone:+972 3 961 9636  
Fax:+972 3 961 9644  
email:comtrans@comtrans.co.il

### JAPAN

#### INTERROLL (JAPAN) Co. Ltd.

Tokyo Genbuko Kaikan 10F, 5-30-13 Toyo  
Koto-ku, Tokyo 135-0016, Japan  
Phone:+81 3 5617 8071  
Fax:+81 3 5617 8072  
email:jpn-sales@interroll.com

### SINGAPORE

#### INTERROLL (ASIA) Pte. Ltd.

386 Jalan Ahmad Ibrahim 629156 Singapore  
Phone:+65 6 266 6322  
Fax:+65 6 266 6849  
email:sgp-sales@interroll.com

### THAILAND

#### RULMECA THAILAND Co. Ltd.

41/15 Moo 6, Bangchalong, Bangplee Samut-  
prakarn 10540 (Bangkok)  
Phone: +66 2 337 0297  
Fax :+66 2 337 0302  
Email: th-sales@rulmecca.co.th

## EUROPE

### DENMARK

#### RULMECA A/S

Hammerholmen 39GDK – 2650 Hvidovre-  
Denmark  
Phone:+45 36 776755  
Fax:+45 36 776855  
email:dk@rulmecca.com

### FINLAND, ESTONIA, LITHUANIA & LATVIA

#### FA. MARKKU SARJOKOSKI

Finerintie 20 FIN-03250 Ojakkala (Helsinki)  
Phone:+358 922435510  
Fax:+358 922435100  
email:markku.sarjokoski@kolumbus.fi

### FRANCE

#### PRÉCISMÉCA Equipment de Manutention

Rue de La Gare F-67700 Otterswiller  
Phone:+33 3 88 71 58 00  
Fax:+33 3 88 91 28 01  
email:info.france@rulmecca.com

### GERMANY

#### RULMECA Germany GmbH

Wilslebener Chaussee 12-14 D-06449  
Aschersleben, Germany  
Phone:+49 (0) 3473 956-0  
Fax:+49 (0) 3473 956-210  
email:faa@rulmecca.com

### GREECE

#### TECOM KOUKOULIS Ltd.

Ag. Nicolaou 60 16674 Glyfada Greece  
Tel:+30-2109604101  
Fax:+30-2109604100  
email:tecom@otenet.gr

### ITALY

#### RULLI RULMECA S.P.A.

Via A. Toscanini, 11-24011 Almè (Bergamo)  
Phone:+39 035 4300 111  
Fax:+39 035 545 523  
Web:www.rulmecca.it  
email:rulmecca@rulmecca.it

### NORWAY

#### INTERROLL A/S

Kobbervikdalen 93 BN-3036 Drammen  
Phone:+47 32 882600  
Fax:+47 32 882610  
email:n-sales@interroll.com

### PORTUGAL

#### RULMECA DE PORTUGAL, LD

AP. Ind. do Tortosendo Rua A Lote 15  
Apartado 1136200-823 TORTOSENDO  
Phone:+351 275 330780  
Fax:+351 275 330789  
E-mail:rulmecca@rulmecca-interroll.pt

### RUSSIA

#### RULMECA FAA GmbH

Büro Moskau: Leninski Prospekt 95  
A117313 Moskau, Russia  
Phone/Fax: +7 495 132 37 74  
email:faamsk@com2com.ru

### SPAIN

#### RULMECA ESPANA S.L.

C.I.Santiga, C/ Puig dels Tudons 5E-08210  
Barberà del Vallès (Barcelona)  
Phone:+34 93 729 96 52  
Fax:+34 93 729 09 59  
email:espana@rulmecca.com

### SWEDEN

#### RULMECA A/S

Hammerholmen 39GDK – 2650 Hvidovre  
Denmark  
Phone:+45 36 776755  
Fax:+45 36 776855  
email:dk@rulmecca.com

### TURKEY

#### ROL-ER MAKINA SAN.VE.TIC. Ltd.

Sti.Zihni Sakaryali Sok. Ufulk Apt. No. 1  
D.1181070 Snadiye, Istanbul, Turkey  
Phone:+90-216-386 37 75  
Fax:+90-216-386 38 22  
email:roler@superonline.com

### UNITED KINGDOM

#### RULMECA UK Ltd.

Brunel Road Earlstrees Ind. Estate GB-  
Corby, Northants NN17 4UX  
Phone:+44 1536 748525  
Fax:+44 1536 748535  
email:uk@rulmecca.com

## NORTH & SOUTH AMERICA

### CANADA

#### PRECISMECA Ltd.

606 – 19th Avenue Nisku,  
Alberta T9E 7W1, Canada  
Phone:+1 780 955 2733  
Toll free:+1-800-661-4065  
Fax:+1 780 955 9412  
Web:www.precismeca.ab.ca  
email:sales@precismeca.ab.ca

### UNITED STATES

#### RULMECA Corporation

6508 Windmill Way, Suite B  
Wilmington, North Carolina, USA, 28405  
Phone:+1-910-794-9294  
Fax:+1-910-794-9296  
Web:www.rulmecacorp.com  
email:mgawinski@rulmecacorp.com

### VENEZUELA

#### INDUSTRIAS RULMECA S.A.

Zona Industrial Municipal Norte Calle Este  
Oeste Galpón 67-200 Valencia,  
Edo. Carabobo. Venezuela  
Phone:+58-241-833.62.49  
Fax:+58-241-832.15.17  
email:rulmecca@cantv.net



## **RULMECA Corporation**

6508 Windmill Way, Suite B

Wilmington, North Carolina, USA, 28405

Phone: 910-794-9294

Fax: 910-794-9296

Web: [www.rulmecacorp.com](http://www.rulmecacorp.com)

email: [mgawinski@rulmecacorp.com](mailto:mgawinski@rulmecacorp.com)